




PRODUCT PROFILE

Zebra® Belt Skimmer is a Traditional Favorite

- Steel, heavy-duty construction
- Removable, easy-to-clean oil collection tray
- Continuous-duty, fan-cooled motor
- Self-tensioning belt on fixed lower pulley (to 24")
- Hanging lower pulley design (36" and up)
- Dual wiper set with lifetime warranty
- One year warranty all other parts (except steel belts)
- Accessories shown below

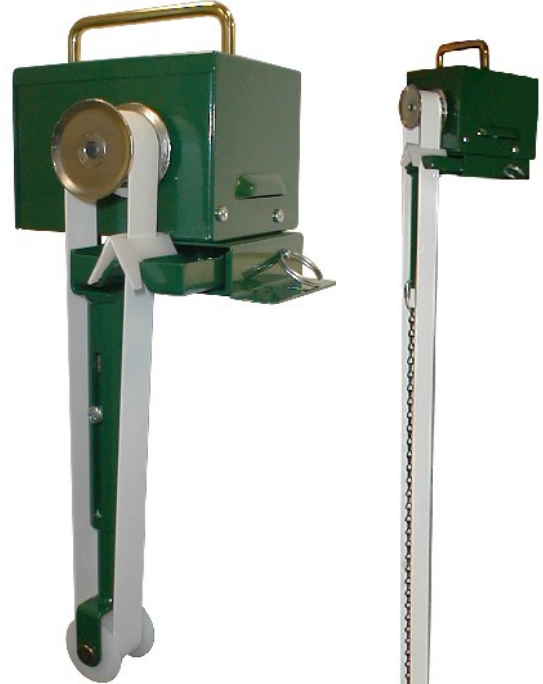

Belt Skimmer, Diverter™ and Lockjaw™ shown here



NEW

Outboard Motor Shaft for longer steel belt life in chemically aggressive applications

Model	Part Number*	Belt Type	Fluid Max Temp	Capacity	Belt Reach	Belt Width	Required Access
Belt Skimmer	BPF1-08	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	8" (20cm)	1" (25mm)	2" (50mm)
	BPF1-12	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	12" (30cm)	1" (25mm)	2" (50mm)
	BPF1-18	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	18" (45cm)	1" (25mm)	2" (50mm)
	BPF1-24	Poly	40-80°F (4-27°C)	1 gph (3.8 lph)	24" (60cm)	1" (25mm)	2" (50mm)
	BPF2-08	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	8" (20cm)	2" (50mm)	4" (10cm)
	BPF2-12	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	12" (30cm)	2" (50mm)	4" (10cm)
	BPF2-18	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	18" (45cm)	2" (50mm)	4" (10cm)
	BPF2-24	Poly	40-80°F (4-27°C)	2 gph (7.8 lph)	24" (60cm)	2" (50mm)	4" (10cm)
	BSF1-08	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	8" (20cm)	1" (25mm)	2" (50mm)
	BSF1-12	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	12" (30cm)	1" (25mm)	2" (50mm)
	BSF1-18	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	18" (45cm)	1" (25mm)	2" (50mm)
	BSF1-24	Steel	60-212°F (15-100°C)	1 gph (3.8 lph)	24" (60cm)	1" (25mm)	2" (50mm)
	BSF2-08	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	8" (20cm)	2" (50mm)	4" (10cm)
	BSF2-12	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	12" (30cm)	2" (50mm)	4" (10cm)
BSF2-18	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	18" (45cm)	2" (50mm)	4" (10cm)	
BSF2-24	Steel	60-212°F (15-100°C)	2 gph (7.8 lph)	24" (60cm)	2" (50mm)	4" (10cm)	

*115v motors standard; 220v motors available by adding "E" to end of part number.

*Outboard motor shaft available for steel belt units by replacing the "S" in the part number with "Z".

*Longer reach units available in 1' increments by changing suffix of part number (-36, -48, -60, etc.)



To determine required reach, measure from mounting point to low fluid operating level

Accessories	Part Number	Description
BGST4	Diverter	oil/water separator for pure oil discharge (raises unit by 2", please account for when selecting reach)
BGX1	Lockjaw	Mounting Clamp affixes skimmer to any 1/4" thick wall or barrel, making portability simple
XETIMER	Timer	24 hour, 3 settings per day, 110v plugs to any standard outlet
XETIMER-GSBZ	Integrated Timer	7 day, 2 hour interval settings, integrated within motor housing

Zebra Skimmers Corporation
 PO Box 833 Chagrin Fall, OH 44022 USA
 www.ZebraSkimmers.com
 www.CoolantMaintenance.com
 Phone: 1-440-349-0141
 Toll Free: 1-888-249-4855
 Fax: 1-440-349-1211
 ©December 2008 Zebra Skimmers Corp. All rights reserved.

Contact your Zebra distributor for more information.